

# Sunmodule®

## SolarWorld Module SW 165/175mono/P



The Sunmodule SW 165/175mono/P by SolarWorld offers an innovative module concept.

The monocrystalline 5" cells lie behind a hardened-glass glazing and are embedded in transparent EVA (ethylene-vinyl-acetate). The back of the module is sealed with a very high quality Tedlar film.

This compact top-quality product represents the ideal solution for every application.

Distributor

**Renewpowers Technologies Pte Ltd**

+65 6741 7123 Phone

+65 6441 7379 Fax

rpt@renewpowers.com

www.renewpowers.com



	Module
Length:	63.9 inch
Width:	32.0 inch
Height:	1.6 inch
Frame:	Aluminium
Weight:	40 Lbs.

Edition: June 2006



SolarWorld Industries America LP  
4650 Adohr Lane  
P.O. Box 6032  
Camarillo, CA 93011  
E-Mail: [service@solarworld-industries-america.com](mailto:service@solarworld-industries-america.com)  
[www.solarworld-industries-america.com](http://www.solarworld-industries-america.com)

SolarWorld California, Inc.  
P.O. Box 81622  
San Diego, CA 92138-1622  
E-Mail: [service@solarworld-ca.com](mailto:service@solarworld-ca.com)  
[www.solarworld-ca.com](http://www.solarworld-ca.com)

## SolarWorld Module SW 165/175 mono/P

### Performance under standard test conditions (STC)

Peak power (Pmax)	165 Wp	175 Wp
Maximum power point voltage (Vmpp)	35.0 V	35.4 V
Maximum power point current (Impp)	4.72 A	4.95 A
Open circuit voltage (Voc)	44.5 V	44.6 V
Short circuit current (Isc)	5.4 A	5.43 A

### Performance at 800 W/m<sup>2</sup>, NOCT, AM 1.5

Peak power (Pmax)	120 Wp	127 Wp
Maximum power point voltage (Vmpp)	31.6 V	32.2 V
Maximum power point current (Impp)	3.8 A	3.9 A
Open circuit voltage (Voc)	40.0 V	40.4 V
Short circuit current (Isc)	4.2 A	4.25 A

Minor reduction in efficiency under partial load conditions at 25°C:  
at 200 W/m<sup>2</sup>, 92 % (+/- 3 %) of the STC efficiency (1000 W/m<sup>2</sup>) is achieved.

### Component materials

Cells per module	72
Solar cells	monocrystalline silicon
Cell dimensions	125 x 125 mm

### Thermal characteristics


NOCT	45.5°C
TK Isc	0.03 %/K
TK Voc	-0.29 %/K

### System design characteristics

Maximum system voltage	600 V
------------------------	-------

### Rated power and maximum tolerance

Rated power	165/175 Wp +/- 3 %
Connecting sockets	IP 54
Plug	MC type 3

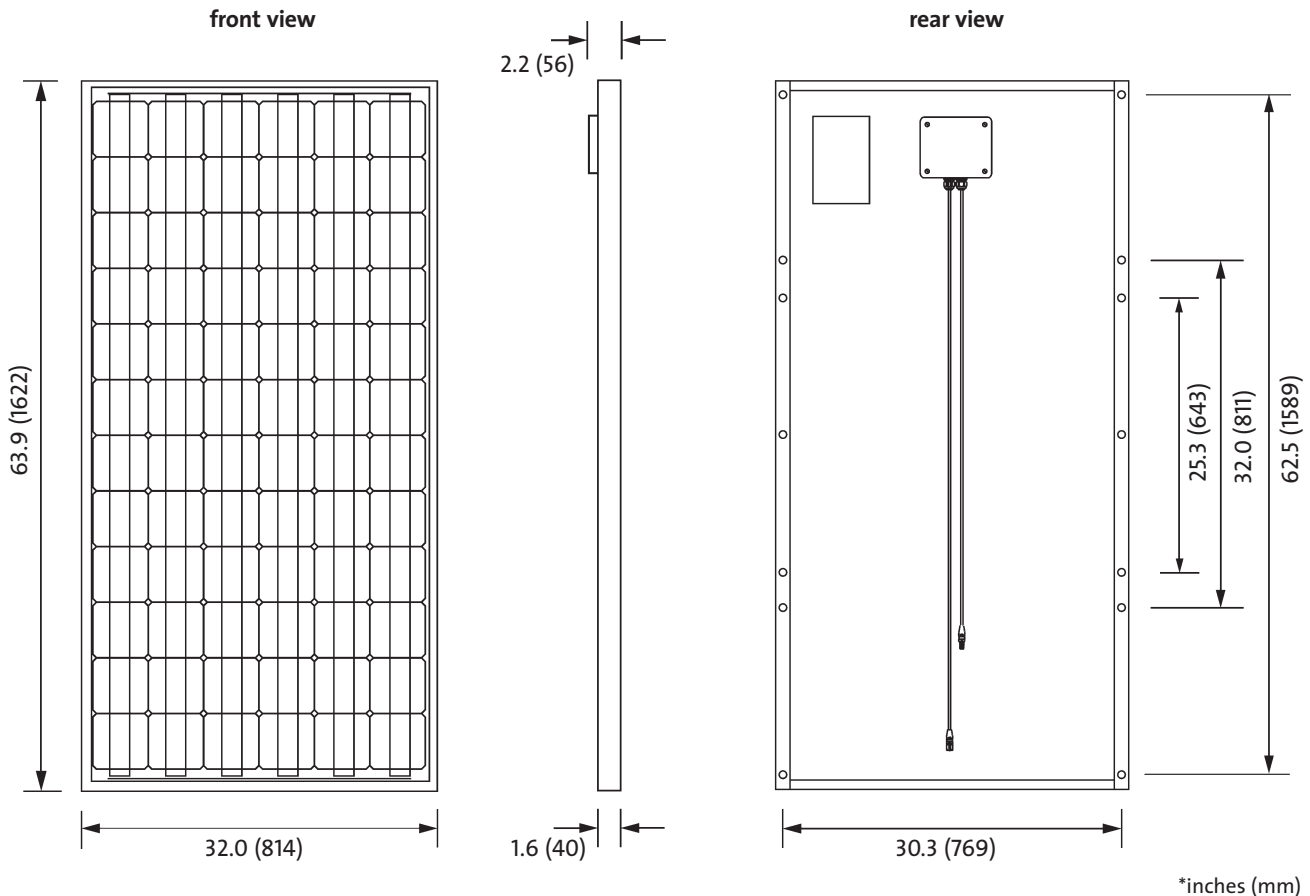

Modules formerly known as *Shell PowerMax Ultra* certified according to:



SolarWorld AG reserves the right to make specification changes without prior notice.  
For detailed information on this product please consider the installation manual.